



# VX-TBL

## In-line terminal box with optional protection

### Use

This is used in terminating cables of secondary telephone networks to the cable pairs of subscriber lines.

The VX-connection module provides a connection point between an exchange-side cable pair and a distribution pair. It incorporates a 5-point plug-in module to provide continuity and a range of other options. Removal of the plug-in module does not disturb wire connections but makes contacts to them available for testing to both sides of the network.

It is especially recommended for:

- outdoor connections where the environmental conditions are extremely aggressive
- terminations where user development characteristics require future flexibility in terms of the type of protection or filtering capabilities.

### Description

The box consists of a body and cover which house VX modules on a DIN rail. Provision for wall mounting is incorporated in the body of the box.


The lid has various opening positions, which can be selected according to the amount of working space available, and is also fitted with a seal to limit water entry.

Grommets are provided for dropwire and pair access.

The box locking mechanism is mounted in the base and is effective on closing the box; to open the box again a special key or a screwdriver is required depending upon the lock type.

The connection modules are designed for mounting on a standard DIN rail and can therefore be mounted in a variety of housings in whatever quantities are required. The small footprint (2 cm wide) ensures a compact product.

## Dimensions

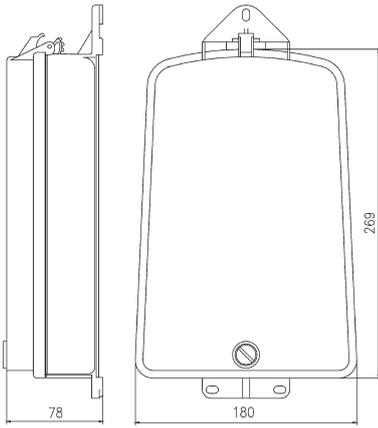

## Ordering information

Description	Number of pairs	Plug-in module configuration	Plug-in module test access type	Tyco code
VX-TBL-10-P	10	Continuity	Pins	3-1199507-0
VX-TBL-10-CG04	10	230 V GDT	Crocodile	1-1199298-6

For other configurations, please consult your local Tyco Electronics sales engineer.

## Specifications

### Contact characteristics

#### Drop wire connector

Gauge range	0.4 to 1.05 mm $\varnothing$
Insulation diameter	5 mm max. $\varnothing$

#### Pair connector

Gauge range	0.4 to 1.05 mm $\varnothing$
Insulation diameter	3 mm max. $\varnothing$

#### Current conducting capacity

20 A, 10 A per conductor for 10 minutes at least without causing deformation of the module

#### Insulation resistance

Dry atmosphere	$> 10^{12} \Omega$
Salt fog (ASTM B117)	$> 10^{10} \Omega$
Immersion in water (15 days in 3 % NaCl solution)	$> 10^{10} \Omega$

### Mechanical characteristics

Base	Polycarbonate RAL 7035
Cover	Polycarbonate RAL 7035
Cable grommet	EPDM
Dropwire grommet	Thermoplastic rubber
Pair/drop wire housing screw	Special passivated direct + lacquered Zamac alloy
Drop wire housing body	Transparent polycarbonate
Body	Flame retardant (UL94) fiber-glass reinforced polycarbonate

Tyco Electronics, TE logo and VX are trademarks

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem NV  
 Diestsesteenweg 692  
 3010 Kessel-Lo, Belgium  
 Tel 32-16 351 011 (USA)1-919-557-8900  
 Fax 32-16 351 697 (USA)1-919-557-8498  
[www.tycoelectronics.com](http://www.tycoelectronics.com)  
[www.telecomosp.com](http://www.telecomosp.com)  
 TC 631/M/DS/4 10/06

Tyco Electronics Raychem, S.A.  
 Polígono industrial Mediterráneo  
 C/. La Fila, parcela 1  
 46550 Albuixech-Valencia, España  
 Tel 34-96-141 70 72  
 Fax 34-96-141 74 15

 **Tyco Electronics**  
 Our commitment. Your advantage.